QUANTITY

Open fryers

MODEL OFE-141 1-well electric OFE-142 2-well electric



OFE-141 single well split-vat electric open fryer with **COMPUTRON**[™]1000 control.

Standard Features

• Built-in filtration with pump motor.

- Hinged elements for easy vat cleaning.
- Separate pump switch.
- Stainless steel construction for easy-cleaning and long life.
- COMPUTRON[™] 1000 control.
 - Programmable
 - LED Time/Temp display
- Simple UP/DOWN arrows
 Heavy-duty stainless steel
- rectangular fry pot.
- Availble with full or split vat(s).
- Specially designed cold zone prevents scorching.
- 4 heavy-duty casters, 2 locking.

General Information

Henny Penny open fryers offer high-volume frying with simple programmable operation and fast, easy built-in filtration.

The OFE-140 Series open fryers are available in full vat or split vat configuration. The split vat choice gives you the flexibility to fry smaller batches of different products in separate environments at the same time—a great way to multiply your profits with one fryer.

Henny Penny open fryers recover temperature very quickly. Fast recovery translates into higher throughput, lower energy costs and longer frying oil life.

A built-in filtration system quickly drains, filters and returns hot frying oil with no separate pumps or pans required. Frequent filtering extends frying oil life, improves product quality and reduces oil costs.


The OFE-140 Series open fryers feature a heavy-duty stainless steel fry pot that promotes fast even cooking.

The **COMPUTRON**[™]**1000** control offers programmability in an easy-to-use digital control panel with LED display.

Accessories shipped with unit

- Fry baskets—please select one
 - OFE-141
 - □ 1 full basket
 - □ 2 half baskets
 - OFE-142
 - □ 2 full baskets
 - □ 1 full and 2 half baskets
 - □ 4 half baskets
- 1 basket support for each vat
- Lift tool for electric element
- · Drain pan with cover


Options available separately □ Fry well cover





Open fryers

MODEL OFE-141 1-well electric OFE-142 2-well electric

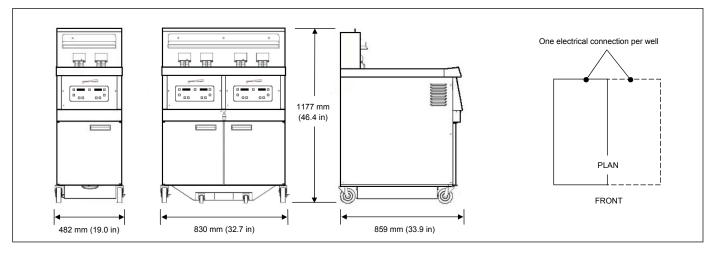

Dimensions

Width Depth Height	OFE-141 482 mm (19.0 in) 859 mm (33.9 in) 1177 mm (46.4 in)	OFE-142 830 mm (32.7 in) 859 mm (33.9 in) 1177 mm (46.4 in)	Full va Split v			
Required clearances						
Sides:	N/A					
Back:	N/A					
Front: 762 mm (30 in.) filter pan removal						
Crated dimensions						
	OFE-141	OFE-142				
Length	950 mm (37.4 in)	950 mm (37.4 in)				
Depth	600 mm (23.6 in)	930 mm (36.6 in)				
Height	1325 mm (52.2 in)	1325 mm (52.2 in)				
Volume	0.75 m ³ (26.7 cu ft)	1.17 m³ (41.4 cu ft)				
Net weight						

Oil capacity

Full vat: 26.6 L or 23 kg (28 qt or 51 lb) vat: 14.6 L or 12.7 kg (15.4 qt or 28 lb)

rical

	Volts	Phase	Cycle/Hz	Watts per well	Amps per well	Wire
Full vat	380	3	50-60	14000	21.2	3NG
Split vat	380	3	50-60	7000	10.6	3NG

Length	950 mm (37.4 in)	950 mm (37.4 in)
Depth	600 mm (23.6 in)	930 mm (36.6 in)
Height	1325 mm (52.2 in)	1325 mm (52.2 in)
Volume	0.75 m ³ (26.7 cu ft)	1.17 m ³ (41.4 cu ft)

Net v

96 kg (211 lb) 169 kg (372 lb)

Crated weight

120 kg (264 lb) 210 kg (462 lb)

Bidding Specifications

- Provide Henny Penny model OFE-141 single-well electric open fryer with built-in filtration system or OFE-142 two-well electric open fryer with built-in filtration system
- Unit can be ordered with full or split vat(s). •
- Unit shall incorporate **COMPUTRON**[™] 1000 ٠ digital control.
- Unit control provides for programmable or ٠ manual operation with press-key controls and LED digital display.
- · Materials-cabinet, deck, exhaust stack, filter drain pan and various fittings are stainless steel. Fry pot is heavy duty stainless steel.
- Unit shall have hinged heating elements.
- Unit shall include 4 heavy-duty casters, 2
 - locking.
- Unit ships with fry basket(s): • OFE-141 choice of 1 full basket or 2 half baskets OFE-142 choice of 2 full baskets, 1 full and 2 half baskets, or 4 half baskets

Continuing product improvement may subject specifications to change without notice.

Henny Penny Corporation PO Box 60 Eaton OH 45320 USA +1 937 456.8400 800 417.8417

+1 937 456.8434 Fax 800 417.8434 Fax

