



Modular ice maker - Granular system

Hotel	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█
Restaurant	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█
Fast food	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█
Bar	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█
Disco	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█
Fish market	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█
Supermarket	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█
Medical & SPA	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█
Industry	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█

► Position n°



► Features & Plus

- Granular ice - 80-82% dry
- 1l (water) - 1kg (ice)
- AISI 304 SS Scotch Brite finish
- Tropical class +43°C
- Specific volume 1 m³ = 550 kg of ice
- AISI 304 SS evaporator
- Air cooling system
- Easy cleanable internal rounded surfaces
- Dust-proof water basin
- RoHS Free
- Electromechanical operation
- ON-OFF rocker switch
- Rotation sensor on low speed shaft
- Automatic water charge
- Frame in INOX



AISI 304 SS Scotch Brite finish



AISI 304 SS evaporator



Dust-proof water basin



Easy cleanable internal rounded surfaces

Years Warranty

subject to limitations

► Prod. 24h

Air temp.	Water temp.	lbs
50° F	50° F	2480
70° F	60° F	2392
90° F	70° F	1951

► Certifications available for this model



Intertek

Intertek






Ice Flakes

G 1000



Modular ice maker - Granular system

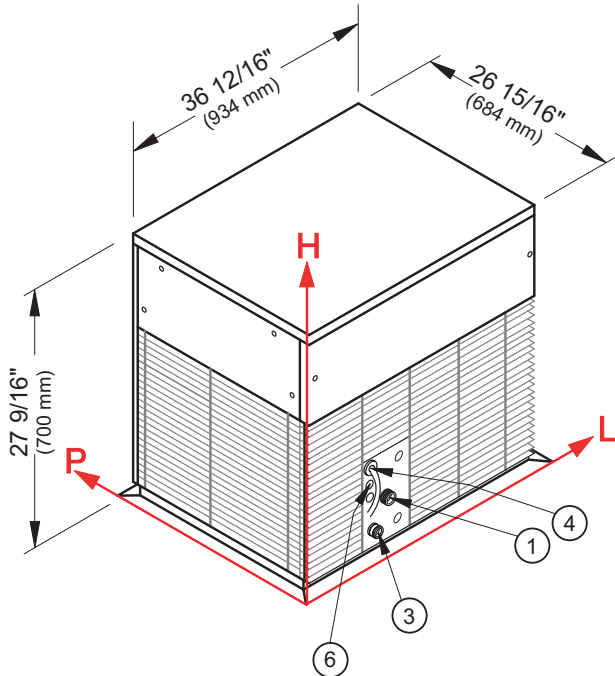

► Working conditions

- Location: **Indoor**

	Min	Max
Ambient temperature	+50° F	+110° F
Water temperature	+37° F	+90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

► Connections

All measures are referred to the down-left corner (L-H-Ø)

- ① Water in.: 14 1/16 " - 4 8/16 " - 3/4"
- ② Water out.: 13 4/16 " - 2 6/16 " - 15/16"
- ③ Water out.: 13 4/16 " - 2 6/16 " - 15/16"
- ④ Electrical connection: 12 11/16 " - 10 2/16 "
- ⑤ Remote connection: 12 11/16 " - 8 8/16 "
- ⑥ Remote connection: 12 11/16 " - 8 8/16 "

► Technical information

Production in 24h *	1951 lbs	Water consumption **	12 gal/100 lbs
Cooling system	A	Sizes (L-P-H in)	36 12/16 - 26 15/16 - 27 9/16
Refrigerant	R404A	Sizes with pack (L-P-H in)	39 3/16 - 30 2/16 - 35 1/16
Standard voltage	220 V ~ 3 60Hz	Net weight	368 lbs
Electrical consumption ***	3200 W	Gross weight	439 lbs
Fuse	20 A	Finish	AISI 304 stainless steel, scotch brite

All the technical information must be considered at the following conditions:

* Production at Ambient temperature **+90° F** / Water temperature **+70° F**

** Water consumption at Ambient temperature **+70° F** / Water temperature **+60° F**

*** Electrical consumption at ambient temperature **+109° F**

Models and specifications are subject to change without notice

Rev. 01 - Issued January 2016



BREMA ICE MAKERS SPA

Via dell'Industria 10,
20020 Villa Cortese (MI), Italy

tel. +39 0331 434811
fax +39 0331 433833

www.bremaice.it
info@bremaice.it

Bim + Data
download



Installation



We are Brema

