



## SV-150 • SV-175 • SV-200 • SV-250 Ice/Beverage Dispenser



SV-250 with IB1090C  
Ice Machine



SV-150



SV-175



SV-200

Servend's new SV Series features a no hassle one-piece structural base, recessed coldplate inlets for more line space behind the splash panel, and a modular design; all resulting in a more durable machine dispensing consistent, quality drinks.

### Standard Features

- One-piece ABS base provides a solid foundation as well as adding structural rigidity to the dispenser.
- Enhanced agitation and drive system provides consistent ice dispense and ease of serviceability.
- Long-lasting LED lighting illuminates the merchandiser while reducing energy usage and lifetime costs.
- Patented Rocking Chute™ simplifies ice dispensing and storage.
- Multi-port flex manifold adds carb/noncarb flexibility. Fast flavor change-overs reduce service complexity.



ISO 9001:2000  
Quality System  
Certified

SV-150 • SV-175 • SV-200 • SV-250 Ice/Beverage Dispenser

2100 Future Drive  
Sellersburg, IN 47172 USA


Tel: 812.246.7000  
Fax: 812.246.7024

[www.manitowocbeverage.com/us](http://www.manitowocbeverage.com/us)



## Specifications

	SV-150	SV-175	SV-200	SV-250
Standard Features	LED lighted merchandiser, Quench graphics, key switch, leg kit, and drain kit.			
Approx. Shipping Weights	250 lbs. / 113 kgs.	277 lbs. / 126 kgs.	304 lbs. / 138 kgs.	335 lbs. / 152 kgs.
Approximate Countertop Weight (w/o ice)	198 lbs. / 90 kgs.	223 lbs. / 101 kgs.	235 lbs. / 107 kgs.	260 lbs. / 118 kgs.
Ice Storage Capacity	Up to 150 lbs. / 68 kgs.	Up to 175 lbs. / 80 kgs.	Up to 200 lbs. / 91 kgs.	Up to 250 lbs. / 114 kgs.
Electrical Requirements	Dispenser: 120V/60Hz/2.8FLA. 220V/50Hz/1 also available.			
Drain	Single 0.75" (1.91 cm) PVC (N.P.T.) drain fitting extends from drain pan. Units can be drained from the bottom or back of unit.			
Number of Valves	6	8	8 or 10	
Ice Machine Compatibility	Manual fill or top-mount with compatible ice machines. Contact MBE for adapter kit requirements for top-mounted ice machine applications.			
Manifold	6 valve 2-1-1-2	8 valve 3-1-1-1-2	8 valve 3-1-1-1-2 / 10 valve 3-1-2-1-3	
Options	Flomatic 464 beverage valves. Both 424 and 464 available in sanitary lever, push button, portion control, and autofill valve. Other valves available. Contact MBE for details. Other options: regulators, installation kits, and side splash panels.			

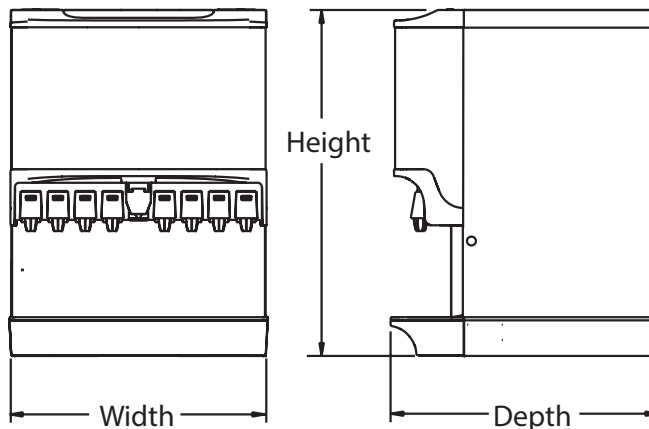

	SV-150	SV-175	SV-200	SV-250
Width	23.00"	25.00"	30.00"	30.00"
	58.42 cm	63.50 cm	76.20 cm	76.20 cm
Depth	31.13"	31.13"	31.13"	31.13"
	79.07 cm	79.07 cm	79.07 cm	79.07 cm
Height*	34.88"	34.88"	34.88"	40.88"
	88.60 cm	88.60 cm	88.60 cm	103.80 cm

\*Height dimension without full lid.  
Add 0.50" (1.27 cm) for full lid.

3730E ©2015 Servend 6/12 Continuing product improvement may necessitate change of specifications without notice.