Delicious rice can be cooked with one touch operation.

Plump and shiny, and once in the moth, well chewy and sticky... The finish of cooked rice can affect the popularity of restaurants. By Maruzen's multistory automatic rice cookers, "Kamado-cooked" savor can be realized. Moreover, the operation is one-touch. Part-timers can easily cook tasty rice.

10 models in total at your choice!



Simple cooking for everyone with one touch operation! Plump and delicious rice like

"kamado-cooked rice"





Inner rails are removable and washable.







The proportional control adjusts the heat perfectly for not only white rice, but also pre-washed rice, takikomi* and porridge. (X Type) *Rice seasoned and cooked with various ingredients

The proportional control realizes fine adjustment of heat ideal to cook delicious rice. Also the temperature sensor controls the cooking processes precisely to cook pre-washed rice, takikomi and porridge perfectly. In addition to white rice, it can cook various menus such as red bean rice, rice cooked with assorted ingredients, and pilaf.

Cooking Fine adjustment of cooking processes will adjustment cook your rice at your preference.

Cooking can be adjusted at 4 processes (① Pre-cooking, ② Main cooking, ③ Additional cooking, and ④ Steaming) to cook your rice ideally.



Reserved timer enables to preset the time you desire to complete cooking.(note) Cooking in the early morning or at peak times is not trouble anymore.



Small amount cooking is available for cooking 1.5 to 3.0kg* of white rice or pre-washed rice. (*For Electric, 1.5 to 2.3 kg)

Manual Cooking Function New Function Cooking

Manual cooking to set the heat and cooking time manually is also available.* It is convenient when you want to cook in a specific cooking time or cook additionally after the completion of main cooking. (*T Type and S Type can set only cooking time.)

Melody Melody announces the completion of cooking. Function

A melody sounds when the cooking is completed. There are 10 patterns of melody to choose and can be set and changed for each stories



Equipped with an overheat prevention device. Also, it automatically stops cooking/heating if the cooking time is abnormally long, and comes with self-diagnosis function that shows errors, such as malfunction of sensor

Remaining time is shown when the steaming process begins.

Hygienic stainless steel exterior.

(Note) When using Reserved timer .. * Keep the room well ventilated while cooking with a presence of a person in charge % Rice may not be cooked well when soaked in water for a long time






comply with and are registered by "the JFEA Commercial Kitchen egistered 2, Commercial Kitchen Equipment Standards" of Japan Food Service

Gas Multistory Automatic Rice Cooker





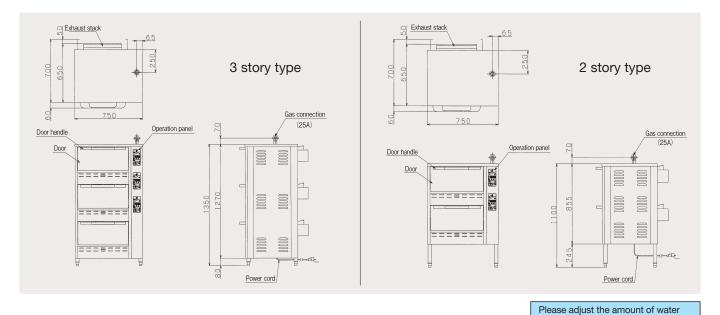

Specifications table

when cooking takikomi and porridge. Rice cooking capacity Gas consumption Rice Gas Power Power Power Weight (Kg) External dimension(mm) Width x Depth x Height Туре Model Accessories consumption Town gas LP gas connection (50/60Hz) cord (1.5kg=1 sho) cooker pot 3 rice cooker pots 3 lids 27.9kW 27.9kW MRC-X3D 750×700×1350 60W 7.5kg (5 sho) x 3 stories 168 X Type (Multifunctional) (24,000kcal/h) (2.00kg/h) 18.6kW 18.6kW 2 rice cooker pots 2 lids MRC-X2D 117 750×700×1100 43W 7.5kg (5 sho) x 2 stories (16,000kcal/h) (1.33kg/h) 2 m with 27.9kW 27.9kW 3 rice cooker plug 7.5kg (5 sho) x 3 stories MRC-T3D 750×700×1350 45W 167 Т Туре Cast (24,000kcal/h) (2.00kg/h) pots 3 lids 1ø100V (ground (Reserved 25A aluminum 18.6kW 18.6kW 2 rice cooker adapter) Timer) MRC-T2D 750×700×1100 30W 7.5kg (5 sho) x 2 stories pot 116 pots 2 lids (16,000kcal/h) (1.33kg/h) 27.9kW (2.00kg/h) 27.9kW (24,000kcal/h) 3 rice cooker MRC-S3D 750×700×1350 45W 7.5kg (5 sho) x 3 stories 167 S Type pots 3 lids (Standard) 18.6kW (1.33kg/h) 2 rice cooker pots 2 lids 18.6kW MRC-S2D 750×700×1100 30W 7.5kg (5 sho) x 2 stories 116 (16,000kcal/h)

Accessories and Options



Cooking capacity table (1.5kg=1 sho)

| | | s capacity per | | | | | | | |
|---|---|--------------------------------------|----------------|--------------------|--|--|--|-----------------|--|
| | | Gas Multistory Automatic Rice Cooker | | | GAS Multistory Automatic Rice Cooker (Cool Kitchen Series) | | | Multifunctional | |
| | | Multifunctional | Reserved Timer | Standard | Multifunctional | | | Multifunctional | |
| | | MRC-X 🗆 D | MRC-T D | MRC-S D | MRC-CX D | | | MERC-X | |
| | White Rice | 1.5 ~ 7.5kg | 3.75 ~ 7.5kg | 3.75 ~ 7.5kg | 1.5 ~ 7.5kg | | White Rice | 1.5 ~ 6.0kg | |
| F | Pre-washed Rice | 1.5 ~ 7.0kg | _ | _ | 1.5 ~ 7.0kg | | Pre-washed Rice | 1.5 ~ 5.0kg | |
| | Takikomi | 3.0 ~ 6.0kg | 3.75 ~ 6.0kg | $3.75 \sim 6.0$ kg | 3.0 ~ 6.0kg | | Takikomi | 3.0 ~ 5.0kg | |
| | Porridge* | 0.75 ~ 3.0kg | _ | — | 0.75 ~ 3.0kg | | Porridge* | 0.75 ~ 2.0kg | |
| | *1pot:Maximum cooking capacity is Rice 3kg + Water 15kg | | | | | | %1pot:Maximum cooking capacity is Rice | | |

1pot:Maximum cooking capacity is Rice 3kg + Water 15kg.

Multistory rice cooker complies with specifications described in "The Public Building Construction Standard Specifications (Machinery installation work)" supervised by Ministry of Land, Infrastructure and Transport's Secretariat Government Buildings Department.

Electric (Cooking capacity per pot)

| | Multifunctional | | | | |
|---|-------------------|--|--|--|--|
| | MERC-X | | | | |
| White Rice | $1.5\sim 6.0$ kg | | | | |
| Pre-washed Rice | $1.5\sim 5.0$ kg | | | | |
| Takikomi | 3.0 ~ 5.0kg | | | | |
| Porridge* | $0.75\sim 2.0$ kg | | | | |
| *1pot:Maximum cooking capacity is Rice 2kg + Water 10kg. | | | | | |