


Other models in this range:  
 MV306 - MV426 - MV430  
 MV456 - MV460 - MV606  
 MV806

## MV Cube Ice Machines up to 465 Kg



MV 1006 with SB530 (sold separately)

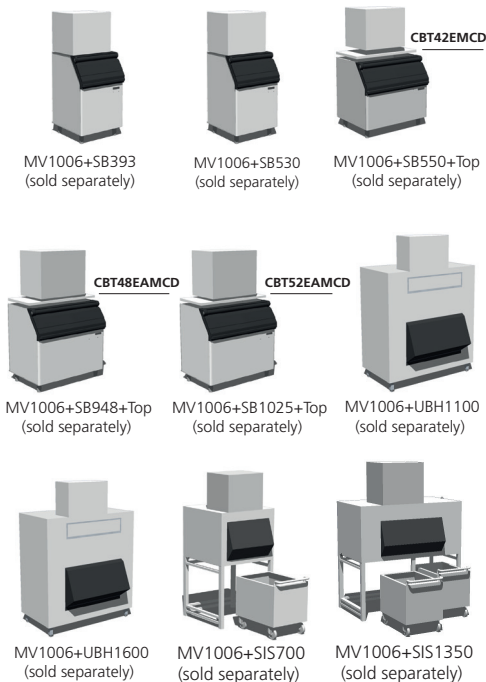

MV1006+SB393 (sold separately)

MV1006+SB530 (sold separately)

MV1006+SB550+Top (sold separately)



MV1006+SB948+Top (sold separately)



MV1006+SB1025+Top (sold separately)




MV1006+UBH1100 (sold separately)



MV1006+UBH1600 (sold separately)



MV1006+SIS700 (sold separately)



MV1006+SIS1350 (sold separately)

This product qualifies for the following listings:



### Standard Features

- **“Global Standard” width-** 30" (76.20 cm) wide
- **Auto-Alert indicator lights-** communicate about operating status: a diagnostic LED light guides the troubleshooting process and helps decisions regarding opening a service call.
- **Front-facing Evaporator -** Ice forming process inspection and routine cleaning operations may be accomplished simply removing the front panel.
- **Hand-removable water distribution tube-** routine cleaning has never been so easy!
- **Embedded antimicrobial-** Ag-Ion® antimicrobial is present in selected food-zone components
- **External Components-** All external panel components are crafted for optimal aesthetic appeal through superior fit and finish
- **Reusable air filter** is easily removable from the outside for ease of cleaning (in air-cooled models)
- **California Energy Commission-** meets or exceeds CEC guidelines

### MV1006 Technologies



|             | <br>+C°<br>-C° | 24h  |       |       | 32°:21°C |       |       | <br>D W<br>H  |
|-------------|----------------|------|-------|-------|----------|-------|-------|---|
|             |                | [kg] | [lbs] | N°    | [kg]     | [lbs] | N°    |   |
| MV1006 AS   |                | 425  | 937   | 42500 | 320      | 705   | 32000 | [WxDxH mm]<br>760x620x725                                   |
| MV1006 WS   |                | 405  | 893   | 40500 | 360      | 794   | 36000 | [WxDxH inches]<br>2915/16 x 247/16 x 289/16                 |
| MVL1006 AS  |                | 395  | 870   | 23235 | 298      | 656   | 23235 |   |
| MVL1006 WS  |                | 377  | 893   | 22180 | 360      | 794   | 17530 |   |
| MVHL1006 AS |                | 425  | 937   | 70550 | 320      | 705   | 53120 | <br>[v/Hz/ph]<br>380-400/50/3<br>Available also<br>230/50/1 |
| MVHL1006 WS |                | 405  | 893   | 67230 | 360      | 794   | 59760 | <br>R 404 A   |



**2** Years Warranty

Subject to certain limitations and exclusions


Certified ISO 9001

[www.scotsman-ice.com](http://www.scotsman-ice.com)  
[www.scotsman-ice.it](http://www.scotsman-ice.it)

Models and specifications are subject to change without notice.

Other models in this range:  
 MV306 - MV426 - MV430  
 MV456 - MV460 - MV606  
 MV806

## MV Cube Ice Machines up to 465 Kg

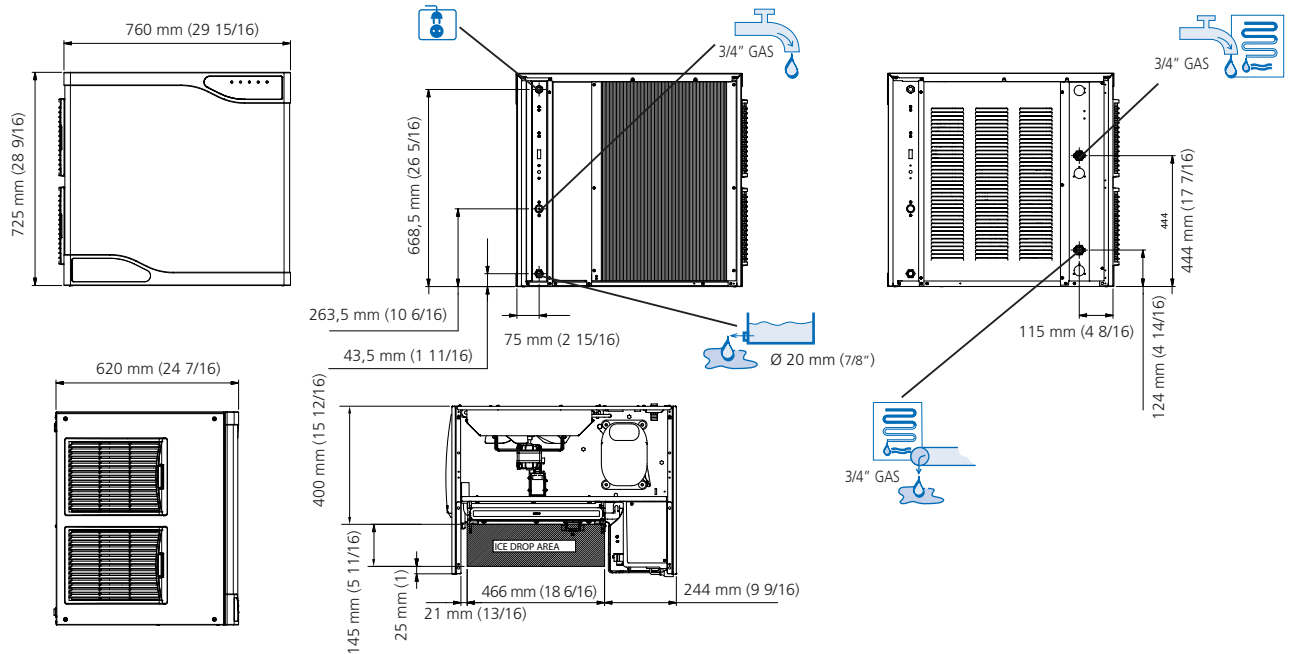

### MV1006 AIR COOLED

| °C / °F | 50° / 10° |     |     |     | 60° / 15° |      |     |     | 70° / 21° |     |     |     | 90° / 32° |     |     |     |     |
|---------|-----------|-----|-----|-----|-----------|------|-----|-----|-----------|-----|-----|-----|-----------|-----|-----|-----|-----|
|         | 10°       | 50° | 60° | 70° | 90°       | 10°  | 50° | 60° | 70°       | 90° | 10° | 50° | 60°       | 70° | 90° |     |     |
| 10°     | 465       | 453 | 440 | 415 | kg        | 1025 | 999 | 970 | 915       | lbs | 425 | 415 | 402       | 380 | kg  |     |     |
| 50°     | 937       | 915 | 886 | 838 | lbs       | 750  | 728 | 705 | 661       | lbs | 38° | 305 | 298       | 290 | 275 | kg  |     |
| 21°     | 340       | 330 | 320 | 300 | kg        | 38°  | 305 | 298 | 290       | 275 | kg  | 100 | 672       | 657 | 639 | 606 | lbs |
| 32°     | 750       | 728 | 705 | 661 | lbs       | 100  | 672 | 657 | 639       | 606 | lbs | 24h |           |     |     |     |     |
| 90°     | 816       | 761 | 761 | 672 | lbs       | 24h  |     |     |           |     |     |     |           |     |     |     |     |

### MV1006 WATER COOLED

| °C / °F | 50° / 10° |     |     |     | 60° / 15° |     |     |     | 70° / 21° |     |     |     | 90° / 32° |     |     |     |     |
|---------|-----------|-----|-----|-----|-----------|-----|-----|-----|-----------|-----|-----|-----|-----------|-----|-----|-----|-----|
|         | 10°       | 50° | 60° | 70° | 90°       | 10° | 50° | 60° | 70°       | 90° | 10° | 50° | 60°       | 70° | 90° |     |     |
| 10°     | 415       | 400 | 385 | 345 | kg        | 915 | 882 | 849 | 761       | lbs | 405 | 390 | 373       | 335 | kg  |     |     |
| 50°     | 893       | 860 | 822 | 739 | lbs       | 32° | 385 | 373 | 360       | 320 | kg  | 90° | 849       | 822 | 794 | 705 | lbs |
| 21°     | 385       | 373 | 360 | 320 | kg        | 90° | 849 | 822 | 794       | 705 | lbs | 38° | 370       | 360 | 345 | 305 | kg  |
| 32°     | 849       | 822 | 794 | 705 | lbs       | 38° | 370 | 360 | 345       | 305 | kg  | 100 | 816       | 761 | 761 | 672 | lbs |
| 90°     | 816       | 761 | 761 | 672 | lbs       | 100 | 816 | 761 | 761       | 672 | lbs | 24h |           |     |     |     |     |

| Minimum         | Maximum         |
|-----------------|-----------------|
| 10°C (50°F)     | 40°C (104°F)    |
| 5°C (41°F)      | 35°C (95°F)     |
| -10%            | +10%            |
| 1 BAR<br>14 psi | 5 BAR<br>70 psi |

|             | Compressor   | Capacity    | Ice Output  | Power | FUSE              | Energy         | Water Inlet | Water Output           | Weight     |
|-------------|--------------|-------------|-------------|-------|-------------------|----------------|-------------|------------------------|------------|
|             | +C°<br>-C°   | [Btu/h] [W] | [Ømm²]      | [W]   | 400/50/3 230/50/1 | [kWh] - 100 Kg | [l/h]       | 32°C 90°F<br>21°C 70°F | [kg] [lbs] |
| MV1006 AS   | Compressor   | 19400 5680  | 5x1,5 3x2,5 | 1900  | 10 A 20 A         | 13,5           | 19,5        | 5,2                    | 98 216     |
| MV1006 WS   | Water Cooled | 19400 5680  | 5x1,5 3x2,5 | 1600  | 10 A 20 A         | 10,3           | 220         | 58,1                   | 98 216     |
| MVL1006 AS  | Compressor   | 19400 5680  | 5x1,5 3x2,5 | 1900  | 10 A 20 A         | 13,5           | 19,5        | 5,2                    | 98 216     |
| MVL1006 WS  | Water Cooled | 19400 5680  | 5x1,5 3x2,5 | 1600  | 10 A 20 A         | 10,3           | 220         | 58,1                   | 98 216     |
| MVHL1006 AS | Compressor   | 19400 5680  | 5x1,5 3x2,5 | 1900  | 10 A 20 A         | 13,5           | 19,5        | 5,2                    | 98 216     |
| MVHL1006 WS | Water Cooled | 19400 5680  | 5x1,5 3x2,5 | 1600  | 10 A 20 A         | 10,3           | 220         | 58,1                   | 98 216     |