

NU 220



Self Contained Ice Machine up to 109 kg

Item #:
Project:
Quantity:



FEATURES

- Front-in & front-out air flow: no need to leave space on the back.
- Resistant stainless steel exterior.
- High grade appearance.
- Front access condenser air filter: a do-it-yourself cleaning operation that saves time and money and makes your ice maker live longer.
- Ergonomic access to ice with sliding disappearing door: one touch door lift makes barman's life significantly easier.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Routine Maintenance visible alarm light on front panel.
- Built-in storage bin: allows undercounter installations for easier fit-in solution, specifically for coffee shops.



NU 220
Dice 10 g
W 22 x D 22 x H 22 mm



NU H 220
Half Dice 6 g
W 10 x D 22 x H 28 mm



NU L 220
Large Dice 15 g
W 28 x D 22 x H 28 mm

CONDENSING SYSTEM

Air cooled
Water cooled

INTERNAL BIN CAPACITY

37 kg

REFRIGERANT GAS

R404A

OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

VOLTAGE V/Hz/ph

230/50/1

Certifications:



IMPORTANT NOTICE:
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free App Scotsman Ice
Apple store
Google play
Windows store



www.scotsman-ice.it
www.scotsman-ice.com

Self Contained Ice Machine up to 109 kg


NU 220



Self Contained Ice Machine up to 109 kg

Item #:
Project:
Quantity:

Self Contained Ice Machine up to 109 kg

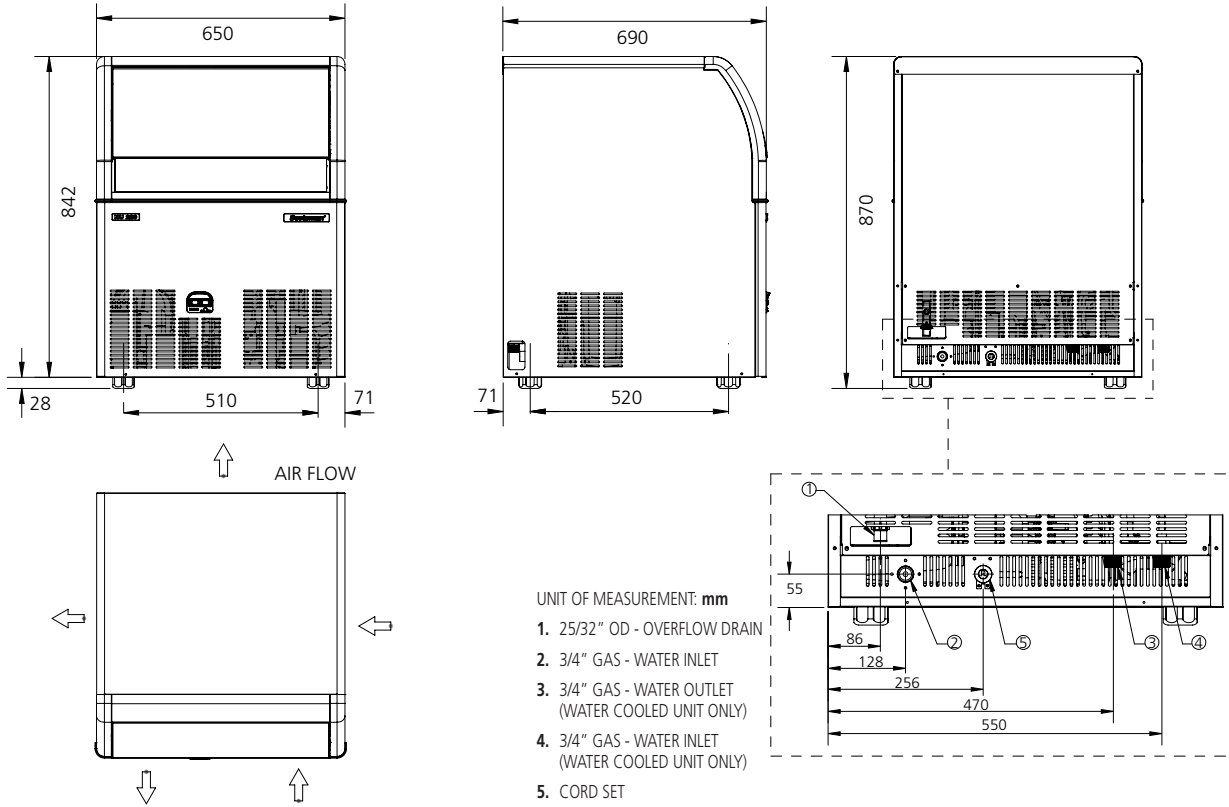

UNIT DATA		Compressor		Circuit wires		Max. fuse size		
		Version	Voltage	Btu/h	W	No.	Ømm ²	A
Size (W x D x H)	650 x 690 x 870 mm	NU 220 AS	230/50/1	4320	1266	3	1.5	10
Net weight	65 kg	NU H 220 AS	230/50/1	4320	1266	3	1.5	10
SHIPPING DATA		NU L 220 AS	230/50/1	4320	1266	3	1.5	10
		NU 220 WS	230/50/1	4320	1266	3	1.5	10
		NU H 220 WS	230/50/1	4320	1266	3	1.5	10
		NU L 220 WS	230/50/1	4320	1266	3	1.5	10
Carton (W x D x H)	715 x 770 x 1015 mm							
Weight	70 kg							

Version	Condensation	Voltage	24 h ice production kg °C Amb. / °C Water			Energy consumption*		Water usage*	Instant power
			10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W
NU 220 AS	Air	230/50/1	109	100	70	19.8	13.9	4.8	600
NU H 220 AS	Air	230/50/1	104	98	65	19.8	12.9	4.5	600
NU L 220 AS	Air	230/50/1	105	95	70	19.8	13.9	4.8	600
NU 220 WS	Water	230/50/1	109	100	85	12.1	68.7	68.7	600
NU H 220 WS	Water	230/50/1	104	98	85	12.1	68.7	68.7	600
NU L 220 WS	Water	230/50/1	105	95	80	12.1	64.7	64.7	600

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions