

# 6220



## SOFT SERVE FREEZER

Single flavor, Countertop, Gravity feed,  
Microprocessor control

### Product Offering

Offer all popular soft serve variations from low or non-fat ice cream to custards, yogurt and sorbet.

### Freezing Cylinder

One, 1.8 quarts (1.7 Liter)

### Mix Hopper

One, 8.5 quarts (8 Liters)

Hopper refrigeration maintains mix temperature Below 40°F (4.4°C) during Cool and Standby modes.

### Mix Low Indicator

When mix level is low, the Mix Low light turns "ON" to alert operator to add mix.

### Standby

Maintains product temperature in the mix hoppers and freezing cylinders below 40°F (4.4°C) during long no-use periods.

### Microprocessor Controls

Automatically regulates refrigeration by monitoring product viscosity to maintain consistent quality.

### Counter

Records number of dispenses per day and total number of dispenses.

### Temperature Display

Displays hopper and cylinder temperature; helps Control product softy

### Output

18 Quarts/Hour

### Safety Protections

- Low temperature and motor overload cutouts protect from cylinder over freezing
- High pressure switch prevents compressor overheat
- Thermal overload protects from motor overheat



Model 6220



Intertek  
4001176



Intertek




Flexible Beater Blade  
Higher capacity, higher overrun

Feed Tube

Low Mix Sensor



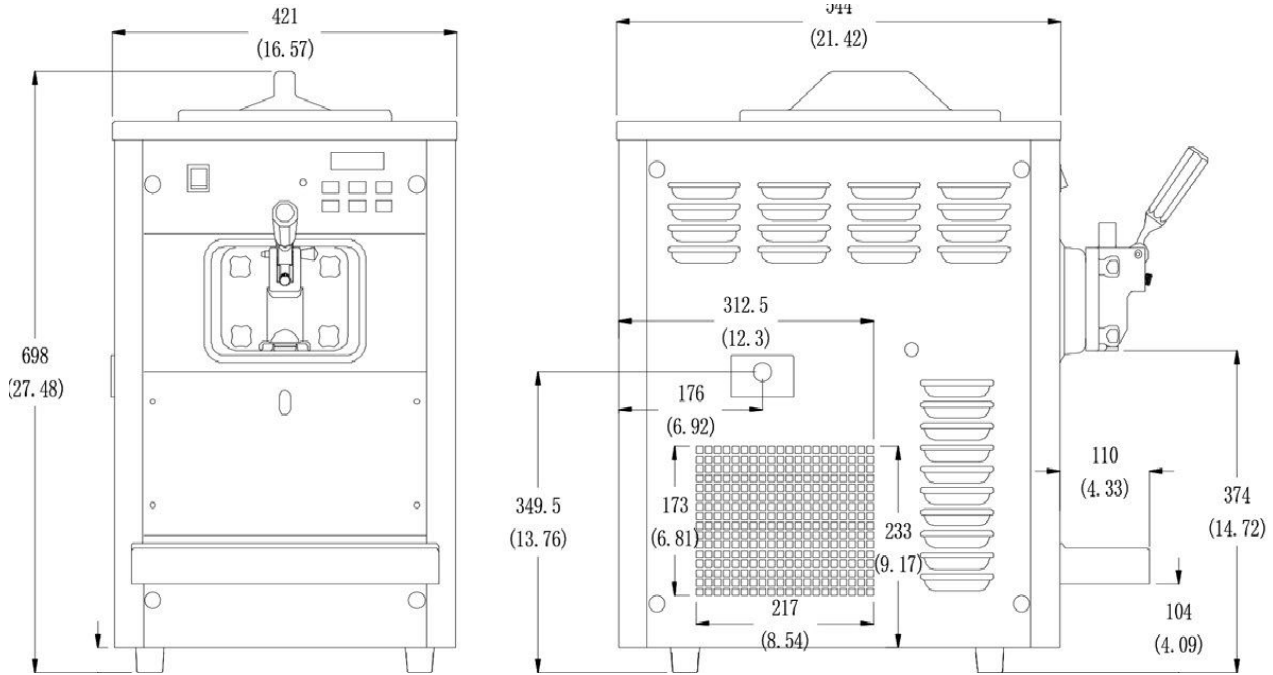

Weight	Ib/Kg
Net	203 / 92
Shipping	225 / 102

<b>Packaging Volume</b>	10.13 CBF / 0.29 CBM
-------------------------	----------------------

Dimensions	Net (in/mm)	Shipping (in/mm)
Width	17 / 421	19 / 477
Depth	21 / 544	28 / 720
Height	27 / 698	33 / 835

Electical	Maximum Fuse Size	Min. Circuit Ampacity	Poles (P) Wires (W)
110-115/60/1	20	16	2P/3W

Plug	Model Number
L5-20	

*This unit may be manufactured in other electrical characteristics. Refer to the local Distributor for availability.*

*(For exact electrical information, always refer to the data label of the unit.)*

### Note

Continuing research results in steady improvements; therefore these specifications are subject to change without notice.

## Specifications

### Electrical

One dedicated electrical connection is required. Unit shall be cord connected or permanently connected. Consult your local Spaceman distributor for available cord receptacle specifications as per local codes.

### Motor

One, 0.8HP

### Refrigeration System

Compressor: One 3,650 BTU/HR, R404A  
(BTUs may vary depending on compressor used.)

### Air Cooled

Minimum clearance of 6" (152mm) on both sides of the machine is required to achieve optimum performance.

The rear of the unit may be placed against a wall. Max room temperature 95° F

### Options:

- Air Exhaust Kit
- Local language Control Systems: English, French, Spanish, German, Dutch, Czech, Chinese

