



FB 80-08/26

Soft Serve Flavoring System

Features

Single-head System attaches to many popular soft-serve freezers and accommodates a wide variety of soft serve products.

8-Flavor Cabinet conveniently maintains up to 8 flavors within the system.

NEW! Component-based Engineering has been optimized for enhanced dispensing performance and greater convenience for troubleshooting and routine maintenance.

Gear Driven Injection Assembly improves reliability and maximizes power transfer to the Injector Head.

Custom Microprocessor provides extensive functionality such as flavor calibration for both flow and taste, or the ability to combine flavors within the system.


Custom Keypad serves as the primary operating station for flavor selections, maintenance functions and system warnings.

Twist-on Syrup Bag Connectors simplify flavor installation and changeover.

Extensive Flavor Selections are (sold separately) highly concentrated and packaged in triple-layer containers for long, stable shelf life that require no refrigeration for maximum flavor impact and yield.

Clean-In-Place (CIP) functions and easy-to-wipe clean stainless steel cabinetry provide effective cleaning in only a few minutes a day.

Peristaltic Pumps provide reliable syrup distribution.

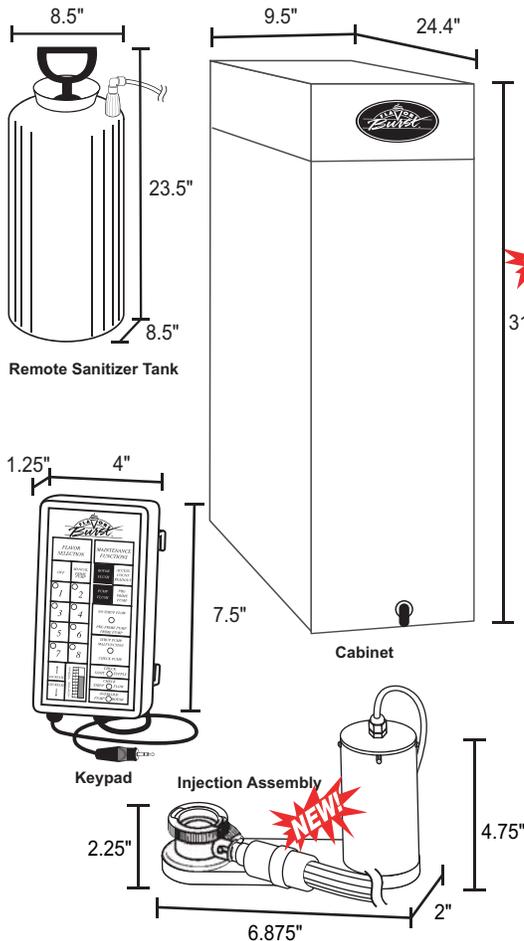

Cabling, mounting brackets, and accessories not shown.

Specifications

Single Electrical Connection is required. Contact your local distributor for additional specifications in accordance with local codes.

Remote Sanitizer Tank must be properly installed and maintained to support clean-in-place (CIP) functions.

Options

- Model-specific Adapter Kit
- Mobile Cart, including new 'Low-Boy' version
- Custom Freezer Shelf
- Integrated Spigot Switch Assembly
- Extension Cables
- Keypad Cover
- Custom Mounting Bracket
- Food Containers
- Point-of-Purchase Materials
- & More...

Small System. Big Profits!

Dimensions	in.	mm.
Width	9.5	241
Depth	24	617
Height	31.5	800
Total Cubic	8 cu. ft.	.2 cu. m.

Weights	lbs.	kgs.
Total Net	108	45.8
Total Crated	141	61.7

Electrical	Minimum Circuit Ampacity
115v 50/60Hz	1
230v 50/60Hz	1/2



This model may also be available in other configurations. Please contact your local distributor for more information regarding specific product applications for this equipment. An ongoing commitment to better serve the Flavor Burst™ family of operators results in steady improvements to our many products and specifications are subject to change without notice.