PRODUCT

-86°C ULTRA LOW TEMP. FREEZERS

The VT ultra low temperature freezers provides the possibility to maintain temperatures as low as -86°C. Supreme stability, reliability, user-friendliness and ease of cleaning makes the VT ULT freezers an ideal solution for laboratories and hospitals.

Nature R refrigerant, cyclopentane insulation combined with recyclable materials, ensures that the freezers are extremely eco-friendly.

SPECIFICATIONS

| Gross volume, litres (cu. ft.) | 198 (7.0) |
|---|----------------|
| Internal storage capacity, litres (cu. ft.) | 189 (6.7) |
| Temperature range (16°C-30°C AMB) | -60°C to -86°C |
| Temperature probes | 1 |
| Compressor | Embraco |
| Refrigerant | Nature-R |
| Noise level, dB | 55 |
| Power consumption, kWh / 24h | 6,0 |
| Power consumption, kWh / year | 2.190 |
| Voltage, V | 220-240 |
| Frequency, Hz | 50 |



FEATURES

| Castors | YES |
|---------------------------------|--------|
| Inner lids | 2 |
| Defrost | Manual |
| Battery Backup | 50h |
| USB | NO |
| Data connection | NO/NC |
| Digital controller | XR30CX |
| Data logging, # logs | NO |
| Analogue chart recorder | NO |
| Max no. of standard vials, pcs. | 9.477 |
| | |

DIMENSIONS

| Height, mm (inches) | 850 (33.5) |
|--------------------------------|------------|
| Height w. castors, mm (inches) | 890 (35.1) |
| Width, mm (inches) | 920 (36.2) |
| Depth, mm (inches) | 695 (27.4) |
| Gross weight, kg (lbs) | 69 (152) |
| Net weight, kg (lbs) | 64 (141) |

LOADING QUANTITIES

| Qty. per 20' / 40' container | 36 / 72 |
|------------------------------|---------|
| Qty. per truck (EU standard) | 94 |





- · State-of-the-art unit designed and manufactured by A/S Vestfrost in Denmark
- Unit optimized for optimal footprint

- · Eco-friendly, HCFC-free Nature R refrigerant
- · Efficient cyclopentane insulation
- · Low energy consumption

- · Digital XR30CX controller with display
- · Approximately 50 hours battery backup
- · Prepared for external logging equipment
- PT1000 internal temperature measuring probe
- · Top-quality castors for explicit movability
- · Integrated lock to prevent unauthorized access
- · High/low temperature alarm

- · User-friendly and maintenance-free
- · Single compressor system
- · Suitable for rack systems
- · ISO 9001, 14001 & 18001 OHSAS Certified

VT 208 -86°C ULTRA LOW TEMP. FREEZERS





PRECISION digital XR30CX controller with display, which is pre-





TOP-QUALITY






DIMENSIONS -86°C ULTRA LOW TEMP. FREEZER

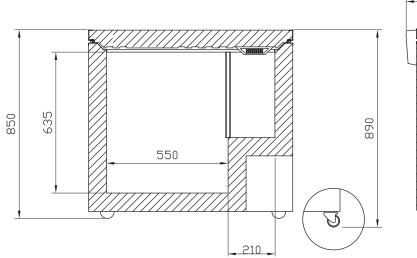





DIMENSIONS

| Height, mm (inches) | 850 (33,46) |
|--------------------------------|-------------|
| Height w. castors, mm (inches) | 890 (35,04) |
| Width, mm (inches) | 920 (36,22) |
| Depth, mm (inches) | 600 (23,62) |
| Gross weight, kg (lbs) | 69 (152) |

> A/S Vestfrost Falkevej 12 DK-6705 Esbjerg Ø www.vestfrostsolutions.com

All measurements in mm

DIMENSIONS -86°C ULTRA LOW TEMP. FREEZER



INTERNAL DIMENSIONS

| Height, mm (inches) | 635 (25) |
|----------------------|--------------|
| Width, mm (inches) | 760 (29,92) |
| Depth, mm (inches) | 440 (17,32) |
| Insulation, mm | 80 |
| Insulation type | PUR |
| Innerliner material | Coated steel |
| Max. AMB humidity, % | 70 |
| Internal humidity, % | <5 |

LOADING CAPACITY

| Max loading, kg (lbs) | 151 (332) |
|----------------------------------|-----------|
| Max no. of standard vials, pcs. | 9.477 |
| Max loading in baskets, kg (lbs) | 56 (123) |


UNIT FEATURES

| Porthole for external probe, mm $\ensuremath{\mathcal{Q}}$ | 12 |
|--|-------|
| Castors (with brakes) | 4 (0) |
| Inner lids | 0 |
| Lid vacuum release | N/A |

BASKET FEATURES [OPTIONAL]

| Basket material | Coated steel |
|-------------------------------|---------------|
| Basket type | Medium |
| Quantity | 0 |
| Maximum basket load, kg (lbs) | 14,50 (31,96) |
| Weight, kg (lbs) | 0,390 (0,86) |





RACKS

VT 208 -86°C ULTRA LOW TEMP. FREEZERS

STORAGE CAPACITY: RACKS FOR 50 MM BOXES

| | | | | The set of |
|----------------|--------------|--------------|--------------------|---|
| VF311220 | 11 | 9 | 99 | |
| VF311200 | 6 | 3 | 18 | |
| VF Product no. | No. of boxes | No. of racks | Total no. of boxes | - |

STORAGE CAPACITY: RACKS FOR 50 MM BOXES (INCL. DIVIDERS)

| VF Product no. | No. of boxes | No. of racks | Total no. of boxes |
|----------------|--------------|--------------|--------------------|
| VF312200 | 6 | 3 | 18 |
| VF312220 | 11 | 9 | 99 |
| Total, vials | | | 9.477 |

STORAGE CAPACITY: RACKS FOR 75 MM BOXES

| VF Product no. | No. of boxes | No. of racks | Total no. of boxes | at to to |
|--------------------|--------------|--------------|--------------------|----------|
| VF311300 | 4 | 3 | 12 | |
| VF311320 | 8 | 9 | 72 | |
| Total, ex dividers | | | 84 | |

STORAGE CAPACITY: RACKS FOR 75 MM BOXES (INCL. DIVIDERS)

| VF Product no. | No. of boxes | No. of racks | Total no. of boxes |
|----------------|--------------|--------------|--------------------|
| VF312300 | 4 | 3 | 12 |
| VF312320 | 8 | 9 | 72 |
| Total, vials | | | 6.804 |

STORAGE CAPACITY: RACKS FOR 100 MM BOXES

| Total, ex dividers | | | 54 | |
|--------------------|--------------|--------------|--------------------|--|
| VF311420 | 5 | 9 | 45 | |
| VF311400 | 3 | 3 | 9 | |
| VF Product no. | No. of boxes | No. of racks | Total no. of boxes | |

STORAGE CAPACITY: RACKS FOR 100 MM BOXES (INCL. DIVIDERS)

| | | | - |
|----------------|--------------|--------------|--------------------|
| Total, vials | | | 4.374 |
| VF312420 | 5 | 9 | 45 |
| VF312400 | 3 | 3 | 9 |
| VF Product no. | No. of boxes | No. of racks | Total no. of boxes |



