



Self Contained Ice Machine up to 120 Kg



Features

- Up to 120 kg (264 lbs.) of flake ice production per day
- Up to 32 kg (70 lbs.) built-in ice storage
- Electronically controlled operation, with self-diagnostic functions with external alarm lights providing operational information for early alert and fast diagnosis of operating issues
- External Components constructed from corrosion-resistant stainless steel crafted for optimal aesthetic appeal through superior fit and finish
- Ergonomically convenient, slanted & disappearing storage bin door
- Front Access for Easier Maintenance
- Filter-free air cooled condenser, designed to operate without the need of air filters
- Front-in, front-out airflow allows for built-in installations
- CFC Free R-134 Refrigerant
- 120 mm (4 12/16") legs included, extensions available as option
- Two years manufacturer warranty

AF 200 Technologies



SS AISI 304

Electronic

Model	Fan	10°: 10°C		21°: 15°C		Ice Storage [kg] [lbs]	Dimensions [mm] [inches]
		[kg]	[lbs]	[kg]	[lbs]		
AF 200 AS		120	264	110	242	32 70	[WxDxH mm] 592x622x1006
AF 200 WS		120	264	110	242	32 70	[WxDxH inches] 23"x24"x39"

Standard legs 120 mm high included.

Additional specifications: [v/Hz/ph] 230/50/1, R 134 a

This product qualifies for the following listings:



Flake Ice
Humidity 25%



2 Years Warranty


Subject to certain limitations and exclusions

Certified ISO 9001:2000

www.scotsman-ice.it
www.scotsman-ice.com

Models and specifications are subject to change without notice.

Self Contained Ice Machine up to 120 Kg

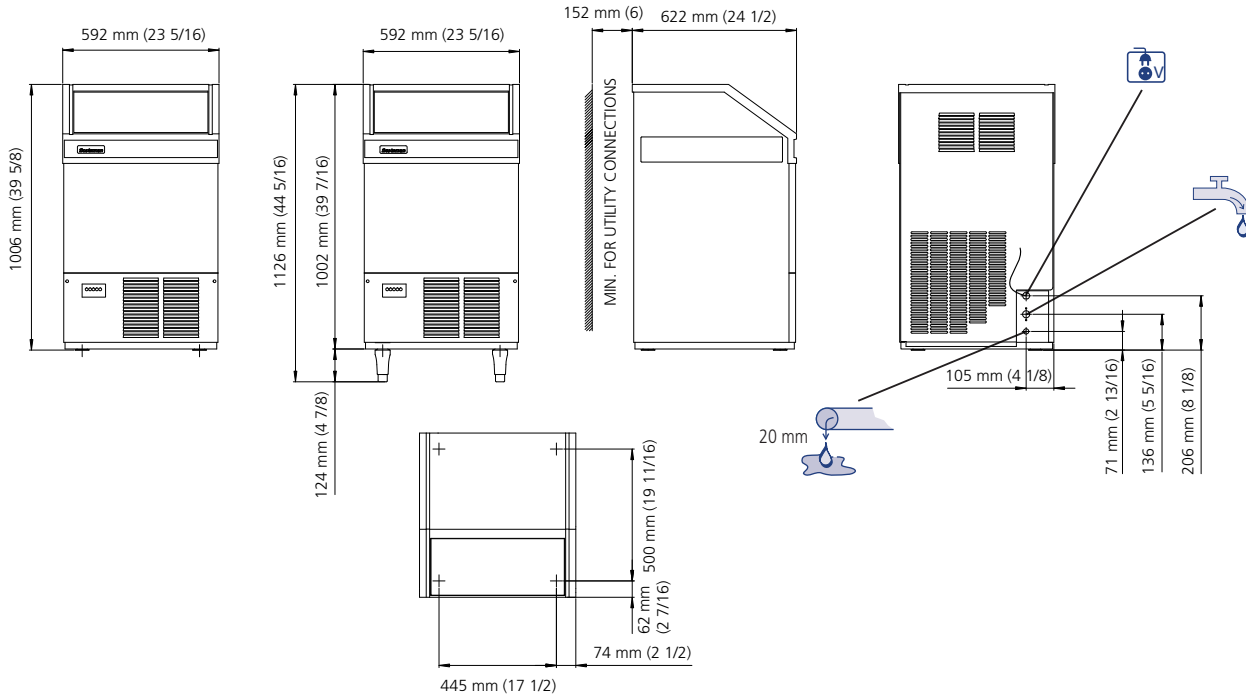

AF 200 AIR COOLED

°C °F	°C				kg
	50° 10°	60° 15°	70° 21°	90° 32°	
10°	120	116	112	104	kg
50°	264	256	247	229	lbs
21°	114	110	106	98	kg
70°	251	242	234	216	lbs
32°	103	99	95	87	kg
90°	227	218	209	192	lbs
38°	96	92	88	80	kg
100	212	203	194	176	lbs



AF 200 WATER COOLED

°C °F	°C				kg
	50° 10°	60° 15°	70° 21°	90° 32°	
10°	120	116	112	104	kg
50°	264	256	247	229	lbs
21°	114	110	106	98	kg
70°	251	242	234	216	lbs
32°	106	102	98	90	kg
90°	234	225	216	198	lbs
38°	104	100	96	88	kg
100	229	220	212	194	lbs



Minimum		Maximum	
10°C (50°F)		40°C (104°F)	
5°C (41°F)		35°C (95°F)	
-10%		+10%	
1 BAR 14 psi		5 BAR 70 psi	

Model	Cooling Type	Capacity [Btu/h] [W]	Ice Size [Ømm ²] [W]	FUSE	Energy [kWh] - 100 Kg	Water [l/h] [gal/h]	Weight [kg] [lbs]	Dimensions [kg] [lbs]
AF 200 AS		3440 1010	3 x 1.5 330	10	10.90	4.1 1.1	65 143	75 165
AF 200 WS		3440 1010	3 x 1.5 330	10	10.90	33 8.7	67 148	77 170

CONTACT POINTS:

Europe
Scotsman Europe-Frimont S.p.A.
Via Puccini, 22
20010 Pogliano (Milano) Italy
Ph: (+39) 02-93960208
Fax: (+39) 02-93960201
scotsman.europe@frimont.it

Asia and Pacific
Scotsman Ice Systems-Frimont S.p.A. (R.O.)
627A Aljunied Road-#04-04 Biztech Centre
Singapore 389842
Ph: (+65) 6738 5393
Fax: (+65) 6738 1959
scotsice@singnet.com.sg

China
Scotsman Ice Systems (Shanghai)
Room 2503, Building 2
20 Xuhong Middle Road, Xuhui District
Shanghai China 200235
Main line: (+86) 21 61313200
Fax: (+86) 21 61313330
scotsman.shanghai@scotsman-china.com

Middle East & N. Africa
Scotsman Ice Systems Dubai Office
Po. Box 21648
Sharjah - U.A.E.
Ph: (+97) 16-5773-164
Fax: (+97) 16-5773-165
scotsman@eim.ae

South Africa
Scotsman Ice Systems SA (PTY) Ltd.
10, Rhodes Street - Kensington B
Po. Box 44 - Riverclub 2149
Ph: (+27) 11-7898400
Fax: (+27) 11-7898411
scotsman@telkomsa.net

Spain
Scotsman España, S.L.U. c/ Galapagar, 12
Poligono Industrial Ventorro del Cano
28925 Alcorcon (Madrid)
Ph: +34-91-1109796
Fax: +34-91-6337423
E-mail: scotsman@scotsman-espana.es
www.scotsman-espana.es